

# Enclume



## BOOK SHELF RACK

### PR8b-24

Enclume racks are the ultimate in Quality, design, strength and function. Congratulations for owning one of the finest storage racks made.

**WARNING:**  
**READ ALL OF THE INSTRUCTIONS**  
**BEFORE ASSEMBLING AND USING**  
**YOUR RACK.**

All of our hammered steel racks are finished with an industrial wax designed to give years of protection to the rack. Cleaning is easily done with a damp cloth. Dry thoroughly after cleaning. If a touch-up is ever needed we recommend a "Pledge" like wax product.


Enclosed you will find everything needed for the assembly and use of your storage rack. Two people make assembly and installation easier. The parts and hardware included are:

#### Hardware included:

- 2 - 3/8" x 1/2" Button Head Screws
- 1 - 1 1/2" Round Head Rivets
- 4 - 1 1/2" Flat Head Rivets
- 7 - Push Nuts
- 4 - 2" Lag Screw
- 1 - 7/32" Allen Wrench
- Toggle Kit

#### Components included:

- 1 - Rectangular Base
- 2 - Arms
- 1 - Grid
- 6 - Angled Pot Hooks
- 6 - Straight Pot Hooks

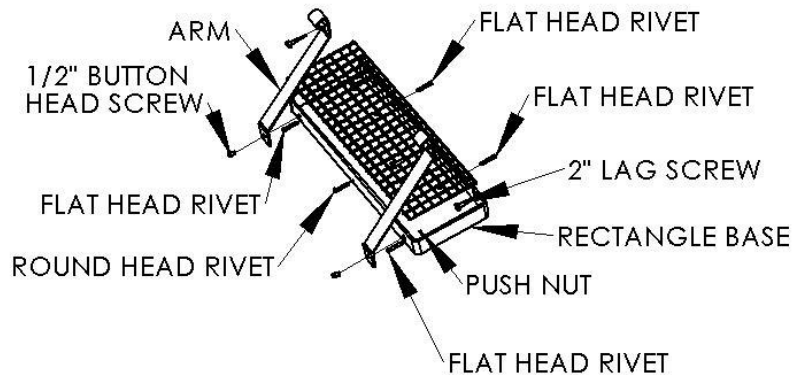

**See reverse side for ASSEMBLY AND INSTALLATION INSTRUCTIONS**

**Limited Warranty:** This product is warranted to be free of material defects for a period of five years from the date of purchase. Customer's exclusive remedy shall be the repair or replacement of the defective product and shall be subject to the following conditions: (1) notice of any defect is received by Enclume within the warranty period and (2) customer returns the defective product to Enclume Design Products, Inc., 24 Colwell St., Port Hadlock, WA 98339, *postage prepaid* within 20 days following a return authorization number (which may be obtained by telephoning the number at the bottom of this instructions) being provided to the customer by Enclume. There are no other warranties, expressed or implied. **THERE ARE NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ENCLUME SPECIFICALLY DISCLAIMS ANY AND ALL INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE PURCHASE OR USE OF ENCLUME'S PRODUCTS.**



If you need help, please call 1-877-ENCLUME  
**Enclume Design Products, Inc.**  
24 Colwell Street, Port Hadlock, WA. 98339  
Phone 360-385-6100 • Fax 360-385-6156

## ASSEMBLY AND INSTALLATION INSTRUCTIONS for PR8b-24


Enclosed you will find everything needed for the assembly and use of your storage rack. Two people make assembly and installation easier. The parts and hardware included are:

### Hardware included:

2 – 3/8" x 1/2" Button Head Screws  
1 – 1/2" Round Head Rivets  
4 – 1/2" Flat Head Rivets  
7 – Push Nuts  
4 – 2" Lag Screw  
1 – 7/32" Allen Wrench  
Toggle Kit

### Components included:

1 – Rectangular Base  
2 – Arms  
1 – Grid  
6 – Angled Pot Hooks – 8" shelf  
6 – Straight Pot hooks - 8" shelf

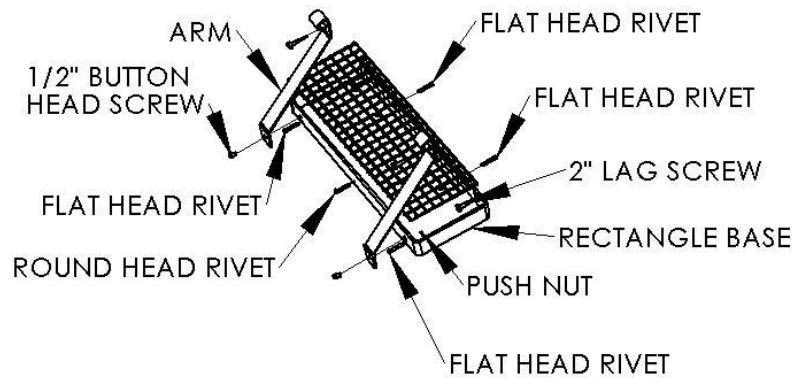

## ASSEMBLY AND INSTALLATION INSTRUCTIONS

### Rack Assembly

1. It is very important to determine the front and back of the rectangular base. The front has two threaded holes and three smaller unthreaded holes. The back has two large holes and two small holes unthreaded.
2. In the back of the rack, Insert two flathead rivets into the smaller holes so they protrude into the rack's interior. Slide a push nut onto each rivet and push toward the rack body so the rivets are held tightly.
3. On the front of the rack, insert the two remaining flathead rivets into the two smaller holes near each end of the rectangular base. Put the one round head rivets into the small hole in the center. Looking at the rack front from left to right with the rivets in place, you should have one flat head rivet two round head rivets and one flat head rivet. (see exploded view above). When you are sure of the order, lock in place with the push nuts as you did on the back.
4. Turn the rectangular base so that the rivets are closest to the bottom. Using the Allen wrench and the two 3/8" x 1/2" button head screws, attach the arms to the rack body through the threaded holes in the front.
5. Mount the rack onto the wall using the four 2" lag screws (two for the back of the rectangle and two for the top of the arms). The lags must go through the washers and into the solid wood of wall studs or into a wooden wall. If you are not on solid wood, use the Toggles and follow the instructions in the kit.
6. After the rack has been mounted onto the wall, place the grid into it with the long wires facing up. Push the grid against the back of the rack so there is clearance for the pot hooks to hang along the front bar (They also hang on the grid).
7. Distribute the weight of your cookware and utensils evenly around the rack and grid.
8. All of our hammered steel racks are finished with an industrial wax designed to give years of protection to the rack. Cleaning is easily done with a damp cloth. Dry thoroughly after cleaning. If a touch-up is ever needed we recommend a "Pledge" like wax product.



It is important that your rack is assembled correctly. If the unit is assembled or used incorrectly, it could become unstable and collapse, possibly causing injury.



If you need help, please call 1-877-ENCLUME  
**Enclume Design Products, Inc.**  
24 Colwell Street, Port Hadlock, WA. 98339  
Phone 360-385-6100 • Fax 360-385-6156

[www.enclume.com](http://www.enclume.com)